

# Feed Your Adventerous Spirit

## Cooking Solutions for the RV Market

### Recessed Diesel Cooktop




*Diesel Cooker X 100 control*

- No open flame
- Robust, high quality CERAN cooking surface
- Easy to use and to clean
- Low current and fuel consumption
- Altitude function for optimal use in mountains
- Hot plate indication light
- Diesel-fueled, directly fed from the tank
- Easy installation thanks to compact size




### How the diesel cooker works

The heat generated by the fuel combustion process is transferred to the ceramic surface, and the exhaust gas is directed out of the vehicle through an exhaust gas line inside the cooling air line. The vapor content of the exhaust gases therefore do not give rise to greater humidity in the vehicle. The diesel cooker's heat output is continuously adjustable. In addition a cooling fan in the ventilation box ensures that the temperature does not reach a critical limit in the installation area. Hot air is drawn off through the cooling air line. Make all of your favorite dishes inside!

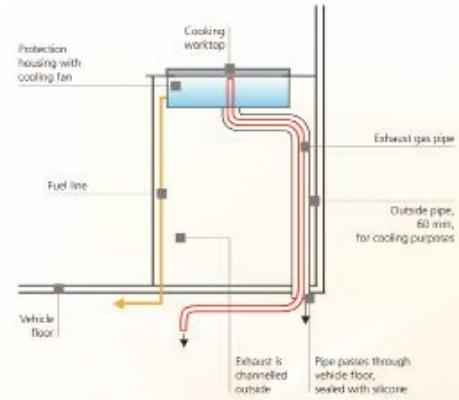

### Technical specifications:

	Diesel Cooker X 100
Cooking power (kW)	0.9 - 1.9
Power consumption (A)	0.3 (max. at start-up approx. 8 A for 4 min.)
Fuel	Diesel
Fuel consumption gal/h (l/h)	0.24 -.05 (0.09 - 0.18 )
Start-up time (min)	~ 3
Rated voltage (V)	12
Dimension of CERAN® hot plate L x W x H (mm)	18" x 12" x 2" (466 mm x 316 mm x 50 mm)
Dimension of protective casing L x W x H (mm)	22" x 14" x 7" (565 mm x 366 mm x 172 mm) .78" waste air nozzle (2 cm)
Weight lbs. (kg)	17.5 lbs. (8 kg) Hot Plate 3 lbs. (1.5 kg) Casing

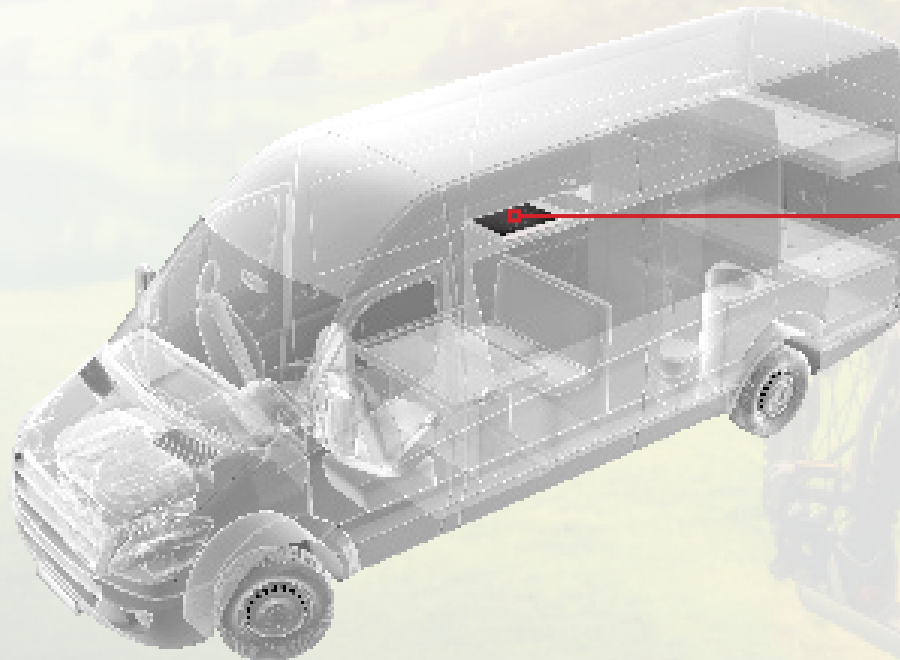

- Quick, drop-in installation
- Nearly silent operation

Webasto Thermo & Comfort  
North America, Inc.  
15083 North Road  
Fenton, Michigan 48430  
USA

Toll Free: 800-860-7866  
Phone: 810-593-6000

[webasto.com](http://webasto.com)